



### ASMUS (Standard duty)

STANCE RANGES FROM 20" TO 30"

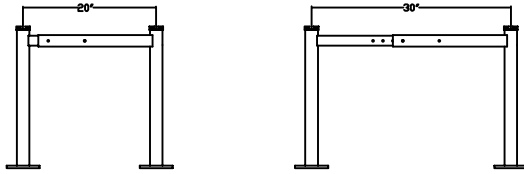


### ASCAB

Aluminum cross mounting angle - when the condensing unit is too narrow to sit on the required stand, a set AS14CAB's allow for unit installation.



### ASMUH (Heavy duty)

STANCE RANGES FROM 34" TO 42"

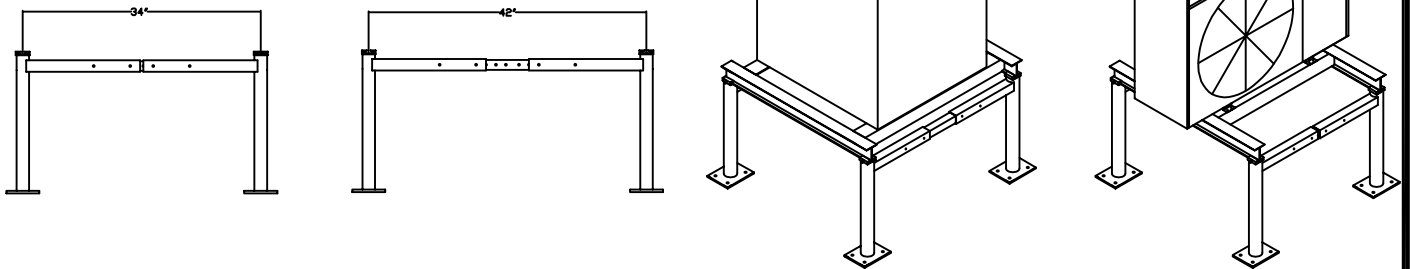

Part No.	Description	Frame Size
ASMUS18	Aluminum stand leg assembly, 20–30" spread, 18" tall	18"
ASMUS24	Aluminum stand leg assembly, 20–30" spread, 24" tall	24"
ASMUS30	Aluminum stand leg assembly, 20–30" spread, 30" tall	30"
ASMUH18	Aluminum stand leg assembly, 34–42" spread, 18" tall	18"
ASMUH24	Aluminum stand leg assembly, 34–42" spread, 24" tall	24"
ASMUH30	Aluminum stand leg assembly, 34–42" spread, 30" tall	30"

Part No.	Description	Size
ASI-3	Aluminum Stand I-Beam, 3'	3'
ASI-6	Aluminum Stand I-Beam, 6'	6'
ASI-9	Aluminum Stand I-Beam, 9'	9'
ASI-12	Aluminum Stand I-Beam, 12'	12'
ASI-15	Aluminum Stand I-Beam, 15'	15'
ASI-18	Aluminum Stand I-Beam, 18'	18'

Part No.	Description	Length
ASCAB-30	3"x3"x1/8" In-Beam Cross Mount Angle for 30" spread	30"
ASCAB-36	3"x3"x1/8" In-Beam Cross Mount Angle for 36" spread	36"
ASCAB-42	3"x3"x1/8" In-Beam Cross Mount Angle for 42" spread	42"

### ASMUS/ASMUH

 ALUMINUM CONDENSING UNIT STAND  
 PRODUCT INFORMATION SHEET

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.