






MODEL FL-165-J316 (3/16" HOLE): For use in model 616, CRD, and CRPD sizes 8" and larger, and model 615 with a height dimension 8" and greater (8"x8", 14x10", etc.)

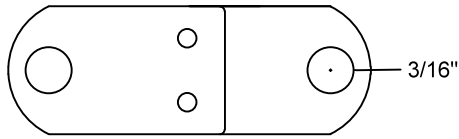


MODEL FL-165-J14 (1/4" HOLE): For use in model 616 and CRD sizes 4-7", and model 615 with a height dimension less than 8" (10"x5", 14"x6", etc)

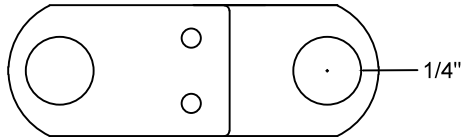

MODEL FL-165-JS: For use in models 150E and 150F

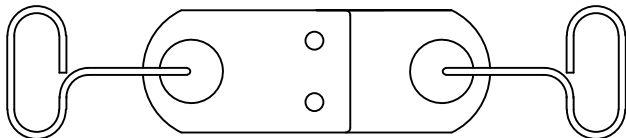

MODEL FL-165-GS: For use in models 151A, B, and C

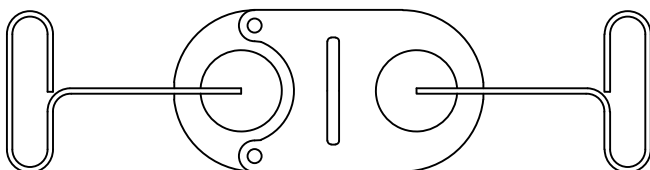

**All links are 165° F standard. Also available in 212° F*

FUSIBLE LINK

FIRE DAMPER FUSIBLE LINK MODELS SPECIFICATIONS

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



DRAWN BY: AF	DATE: 02/17/2009	SCALE: NO TO SCALE	DRAWING NO. FL-TYPES
CHECKED BY: IV	DATE: 01/20/2016	REVISION: C	